

关于卧龙

1984

30

卧龙集团

产品介绍

1Ph 230VAC 50/60Hz

0.15kW-0.3kW

≥ 0.6

-25 60 -40

-30~40

0-10V RS485


B3 B30 B14

IP20 IP44 IP55 IP66

C3-H C4-H

UL CE CCC

		[V]	[Hz]	[kW]	[r/min]					[A]	[%]			
EM4210A15***	1~220-240	50/60	0.15	720/960/1000/1050/1200			200~1200		1.4	80%				
EM4210A13***	1~220-240	50/60	0.25	720/960/1000/1050/1200			200~1200		2.1	81%				
EM4210A12***	1~220-240	50/60	0.37	960/1000/1050/1200			200~1200		2.8	82%				
EM4210B15***	1~220-240	50/60	0.15	1350/1500/1800/2200			200~2200		1.5	81%				
EM4210B13***	1~220-240	50/60	0.25	1350/1500/1800/2200			200~2200		2.2	82%				
EM4210B12***	1~220-240	50/60	0.3	1350/1500/1800/2200			200~2200		3	83%				
	A	B	C	D	E	H	K	L	AB	AC	BB	EB	HD	
42	112	90	45	12.7/15/17/20	/	71	8.5	244	135	102.5	110	/	135	

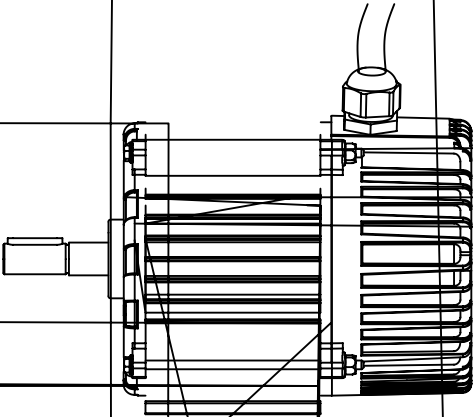

3Ph 380~480VAC 50/60Hz

1.1 2.2kW

≥ 0.9

-25 ~55 -40

-30~40

0-10V RS485

B3 B30 B14

IP55 IP66

C3-H C4-H

UL CE

	[V]		[Hz]	[kW]		[r/min]				[A]	[%]		
EM5610A32***	3~380-480V		50/60	1.1		720/960/1000/1050/1200		200~1200		2.4	86%		
EM5610A21***	3~380-480V		50/60	1.5		720/960/1000/1050/1200		200~1200		3.2	87%		
EM5610A31***	3~380-480V		50/60	2.2		960/1000/1050/1200		200~1200		4.5	88%		
EM5610B32***	3~380-480V		50/60	1.1		1350/1500/1800/2200		200~2200		2.4	88%		
EM5610B21***	3~380-480V		50/60	1.5		1350/1500/1800/2200		200~2200		3.2	89%		
EM5610B31***	3~380-480V		50/60	2.2		1350/1500/1800/2200		200~2200		4.5	90%		
	A	B	C	D	E	H	K	L	AB	AC	BB	EB	HD
56	140	100	/	20/24	/	90/100	11	/	180	138.5	130	/	141

3Ph 380~480VAC 50/60Hz		
1.5	3kW	
≥ 0.9		
-25	~55	-40
-30~40		
0-10V	RS485	
B30		
IP55	IP66	
C3-H	C4-H	
UL	CE	

	[V]	[Hz]	[kW]	[r/min]		[A]	[%]
EM13210A31***	3~380-480V	50/60	1.5	720/960/1000/1200	200~1200	3.0~2.4	89%
EM13210A31***	3~380-480V	50/60	1.8	720/960/1000/1200	200~1200	3.5~2.9	89%
EM13210A31***	3~380-480V	50/60	2.2	720/960/1000/1200	200~1200	4.3~3.5	90%
EM13210A72***	3~380-480V	50/60	2.6	960/1000/1200	200~1200	5.0~4.0	90%
EM13210A41***	3~380-480V	50/60	3.0	960/1000/1200	200~1200	5.8~4.5	90%
EM13210B31***	3~380-480V	50/60	1.5	1300/1450/1500/1800	200~1800	3.0~2.4	90%
EM13210B31***	3~380-480V	50/60	1.8	1300/1450/1500/1800	200~1800	3.5~2.9	90%
EM13210B31***	3~380-480V	50/60	2.2	1300/1450/1500/1800	200~1800	4.3~3.5	91%
EM13210B72***	3~380-480V	50/60	2.6	1300/1450/1500/1800	200~1800	5.0~4.0	91%
EM13210B41***	3~380-480V	50/60	3.0	1300/1450/1500/1800	200~1800	5.8~4.5	91%


应用案例 - EM16010B

EM16010B100**									
Ph 230VAC		50/60Hz		0.25kW		≥ 0.7		-20 ~-60	
-30~40		PWM		IP44		C3-H		UL CE CCC	
		[k		[r/min]				[A]	
EM16010B100**		50/60	4	960/1000/1050/1200		200~1200		8	
EM16010B100**		50/60	5.5	960/1000/1050/1200		200~1200		11 91%	
EM16010B100**		50V 50/60	7.5	960/1000/1050/1200		200~1200		15 91.6%	
EM16010B100**		50V 50/60	4	960/1500/1800/2200		200~2200		8 91.3%	
EM16010B071**		50V 50/60	5.5	960/1500/1800/2200		200~2200		11 92%	
EM16010B101***		3~5V 50/60	7.5	960/1500/1800/2200		200~2200		15 92.7%	
	A	B	C	D	K	L	AC	BB	
160T	254	160	42		15	452	4	2	2

应用案例 - EM16010B

Ph 230VAC			50/60Hz
0.25kW			≥ 0.7
-20 ~-60			-40
-30~40			PWM
IP44			C3-H
UL CE CCC			

			[V]	[Hz]
ZWB**10**	220-240	50/60		

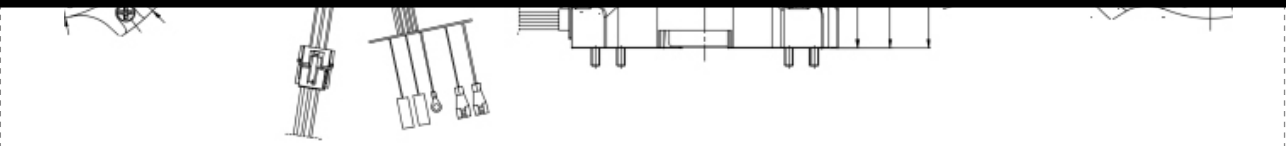

※ 电机轴径，轴长及引线长度可定制

